

29



Soldering station.



MSA	Voltage	Size	Kg
29.227	220 V	195 x 100 x 90 mm	0.800

Soldering station VTSS7, ideal for beginners as well as professionals.

Specifications :

- Supply : 220 V / 50 Hz
- Consumption : 50 VA maximum
- Electronic temperature setting : from 175 to 480° C.

Soldering accessories.



(1)



(2)

MSA		Ø wire	Packaging	Kg
29.615	(1)	0.71 mm	Spool of 500 g	0.520
29.616	(2)	0.71 mm	1 metre wire	0.004

Soldering wire with incorporated flux. Melting point at 179° C.




MSA		Ø braid	Packaging	Kg
29.631		0.80 mm	Spool of 1.5 metres	0.005

Desoldering braid.



MSA	Colour	Size	Kg
29.626	Metal	168 x 55 mm	0.011

Bag of 12 universal soldering rods ready to use with cleaning agent already included, for an optimal job with almost no waste. High resistant soldering on numerous metals whose melting points exceed 600° C. Neither additional scouring solution, solvent or cleaning product is necessary. The rods are used for stainless steel, cobalt-chrome and silver.

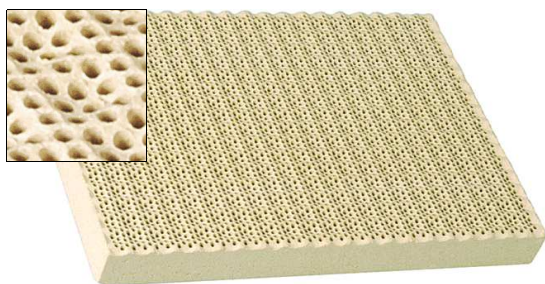

MSA	Size	Kg
29.606	135 x 95 x 13 mm	0.125

Insulating soldering plate.



MSA	Size	Kg
29.614-B	120 x 80 x 30 mm	0.112

Soft charcoal block chemically prepared for soldering. Under the flame the charcoal block turns in red and reflects the heat for more efficient soldering.



MSA	Size	Kg
29.501	155 x 100 x 75 mm	0.705

Base with 2 revolving nippers mounted on a mobile arm for holding items during soldering.



MSA	Size	Kg
29.651	Ø 68 x 152 mm	0.185

Alcohol lamp.
Delivered with a wick.

Spare part :

MSA	Item	Kg
29.651-A	Wick, length 200 mm	0.009

See chapter PERF.



Soldering pastes.



MSA	Contents	Carats	Melting point	Size	Kg
29.611-A14	1.55 g	14	637° C 1180° F	Ø 10 x 115 mm	0.005

EASY type soldering paste in yellow gold.
Delivered in a syringe.



MSA	Contents	Carats	Melting point	Size	Kg
29.611-A18	1.55 g	18	790° C 1455° F	Ø 10 x 115 mm	0.005

EASY type soldering paste in yellow gold.
Delivered in a syringe.



MSA	Contents	Melting point	Size	Kg
29.610-A	14 g	618° C 1145° F	Ø 19 x 160 mm	0.028

EASY type SILVER soldering paste. It contains cadmium.
Delivered in a syringe.



MSA	Contents	Kg
26.623	1.5 ml	0.065

Circuit Maker.
Repairs quartz analog and digital circuitry as well as any other fine wire circuits with a minimum of time and effort.
Eliminates long drying times.
Kit includes 1 bottle with 1.5 ml fluid and an applicator.