



RIVETING STAKES

Riveting stakes and hole plates are in tempered stainless steel. Used for riveting, unriveting or holing small pieces. "V" shape slots are suitable to remove pinions or any other watch components.

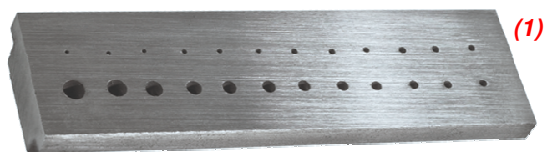


(1)

MSA		Size	Number of holes	Ø holes	Kg
03.901	(1)	53 x 15 mm	24	0.50...2.20 mm	0.030
03.902	(2)	53 x 15 mm	36	0.50...2.50 mm	0.026

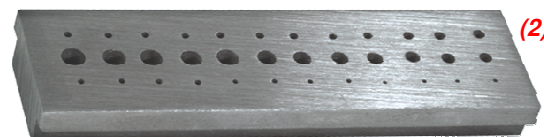


(2)

Hardened steel riveting stake with 24 calibrated holes from Ø 0.50 to 2.20 mm or 36 calibrated holes from Ø 0.50 to 2.50 mm.

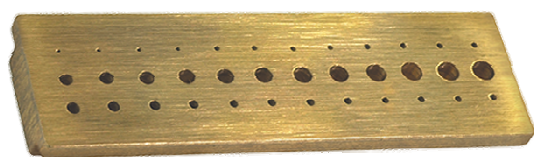


MSA		Size	Number of holes	Ø holes	Kg
03.903		50 x 15 mm	36	0.50...2.50 mm	0.025

Brass riveting stake with 36 calibrated holes from Ø 0.50 to 2.50 mm.

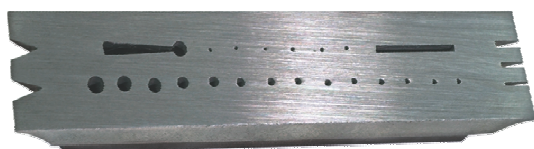

MSA		Size	Number of holes	Ø holes	Kg
03.904		72 x 15 mm	20	0.50...2.50 mm	0.030


Hardened steel riveting stake, with 20 calibrated holes from Ø 0.50 to 2.50 mm, 2 "V" shape slots and 5 notches of different dimensions.



MSA		Size	Number of holes	Ø holes	Kg
03.905		40 x 40 x 40 mm	36	0.30...10.00 mm	0.378

Hardened steel riveting stake, universal cubic shape, with 36 calibrated holes from Ø 0.30 to 10.00 mm and 16 slots with different shapes and dimensions.

For watches, alarm clocks and wall clocks.



MSA		Size	Number of holes	Ø holes	Kg
03.906		46 x 46 x 15 mm	15	0.80...6.50 mm	0.196

Polished hardened steel riveting stake, hexagonal shape, with 15 calibrated holes from Ø 0.80 to 6.50 mm and 4 slots of different dimensions.

Holes : Ø 0.80 - 1.00 - 1.20 - 1.50 - 2.00 - 2.30 - 2.70 - 3.00 - 3.20 - 3.70 - 4.00 - 4.50 - 5.50 - 6.00 - 6.50 mm.

Slots : 0.30 - 0.50 - 0.70 - 0.90 mm.