

Stands.

SWISSMETROLOGIE



MSA	Kg
14.471	5.300

Stand with 520 mm geared column in "Z" with fine adjustment.

- Optional :
- MSA14.150-A, arm to detach the screen
  - MSA14.471-A, optical head support.

SWISSMETROLOGIE



MSA	Kg
14.473	5.300

Stand with 520 mm geared column, transmitted lighting with integrated LED (without zoom support).

SWISSMETROLOGIE




MSA	Kg
14.472	18.430

Stand with a horizontal movement and a 370 mm column in "Z" and an arm to detach up to 422 mm.

- Optional :
- MSA14.150-A, arm to detach the screen
  - MSA14.471-A, optical head support.

SWISS METROLOGIE

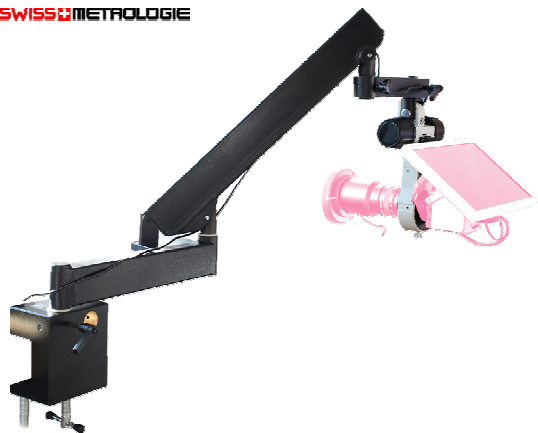

MSA

14.399

Stand with extension arm up to a 920 mm radius with 6 axes of rotation. This enables multi-directional positioning for the most relevant observation such as alignment and hands parallelism.

Accessories.

HOROTEC SWISS



MSA		Size	Kg
14.156	(1)	123 x 115 x 150 mm	0.630
14.157	(2)	123 x 115 x 250 mm	0.770

Transparent protective cover for video inspection and measuring systems.



MSA	Length	Kg
14.150-A	500 mm	0.560

Articulated arm for detaching the screen of the camera from the SMV-1 MSA14.150.  
*Delivered without screen.*



MSA	Kg
14.471-A	0.330

Optical head support for stands MSA14.471 and 14.472.



MSA	Length	Kg
14.150-Y	300 mm	0.035

Connection "X" HDMI cable to connect a second external screen for a synchronized picture.  
*1x male and 2x female.*



MSA	Type
14.151-Y2	1 input-2 output
14.151-Y4 (1)	1 input-4 output
14.151-Y8	1 input-8 output

HDMI splitter with amplifier, Full HD signal.



MSA	Type
14.151-W3	2 input-1 output

HDMI switch for distribution of Full HD signal.



MSA	Type
14.151-H1.5	HDMI, length 1.50 m
14.151-H2	HDMI, length 2 m
14.151-I	HDMI 4K High Speed, length 5 m
14.151-H	HDMI 4K High Speed, length 10 m
14.151-H20	HDMI 4K High Speed, length 20 m

HDMI shielded cable.




MSA
14.150-L

SD Memory card reader.



MSA	Magnification	Kg
14.150-1.5X (1)	1.5x	0.055
14.150-2.0X	2.0x	0.055
14.150-3.0X	3.0x	0.030
14.150-5.0X	5.0x	0.036

Magnifying lens with C-mounting male/female.

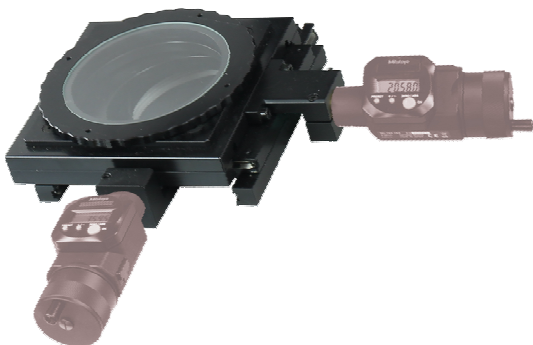

MSA
15.614

Measuring table "X-Y" with rotating circular plate in glass for alignment of the parts.


- Travel 50 x 50 mm
- Clamping device for micrometres Ø 18 mm
- For stand MSA14.400.

Delivered without stops (optional).



MSA	Size	Kg
14.150-T	115 x 115 x 15 mm Ø 95 mm	0.440

Black aluminium table support for transmitted lighting MSA14.150-G.  
Delivered without lighting.



MSA	Size	Kg
14.447	Base Ø 95 mm Top plate Ø 75 mm	0.265

Adjustable aluminium table on swivel to observe movements or components under a binocular, a trinocular or an inspection system.

- The base is compatible with the stands of the SwissMetrologie® range
- The top plate is covered with an anti-skid coating MSA14.447-A (replaceable when worn).

Spare part :

MSA	Item	Kg
14.447-A	Anti-skid coating, Ø 70 mm	0.005