

FIXED



| MSA | Depth | Kg |
|------------|-------|-------|
| 04.311-075 | 75 mm | 0.140 |


Rigid steel fixed saw frame with plastic handle.

ADJUSTABLE



| MSA | Depth | Kg |
|------------|--------|-------|
| 04.316-075 | 75 mm | 0.175 |
| 04.316-100 | 100 mm | 0.185 |

Rigid stainless steel adjustable saw frame with plastic handle.
Steel tension screw to tighten the saw blades.

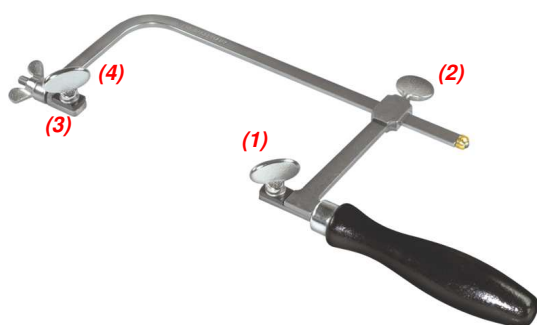

| MSA | Depth | Kg |
|------------|--------|-------|
| 04.315-060 | 60 mm | 0.150 |
| 04.315-070 | 70 mm | 0.150 |
| 04.315-080 | 80 mm | 0.153 |
| 04.315-100 | 100 mm | 0.170 |
| 04.315-120 | 120 mm | 0.180 |
| 04.315-150 | 150 mm | 0.190 |
| 04.315-200 | 200 mm | 0.210 |

Spare parts :

| MSA | Item | Kg |
|----------|---------------------------------|-------|
| 04.310-A | (1) Saw blades screw | 0.007 |
| 04.310-B | (2) Upper screw | 0.005 |
| 04.310-C | (3) Fixing plate for saw blades | 0.002 |
| 04.310-D | (4) Washer for saw blades | 0.001 |

Saw frame made of rigid and resistant steel, with black varnished wooden handle.

Delivered with 1 toothed plate and fixing screws to firmly hold the saw blades in place. Tension screw to tighten the saw blades.