

sylvac



MSA


15.179

SYLVAC® digital measuring instruments box for apprentices, composed of :
- Electronic caliper 150 mm, precision 0.01 mm (Protection IP67)
- Electronic micrometre 0-30 mm
- Flexible rule 150 mm
- Precision square
- 1 thread gauge + 1 radius gauge
- Scriber 180 mm.
Delivered in 1 synthetic case.

Lever indicators GIROD-TAST.

- High sensitivity, repeatability and accuracy (according to DIN 2270 standards). Unaffected by magnetic fields
- Automatic reversing contact point, with constant clockwise rotation
- Easy and error-free reading by only one revolution of the hand
- Robust one-piece housing ; corrosion resistant with satin chrome finish
- Designed for universal applications. Well-suited for workshop use.
- Interchangeable carbide contact point swivels over 240°.

GIROD
INSTRUMENTS

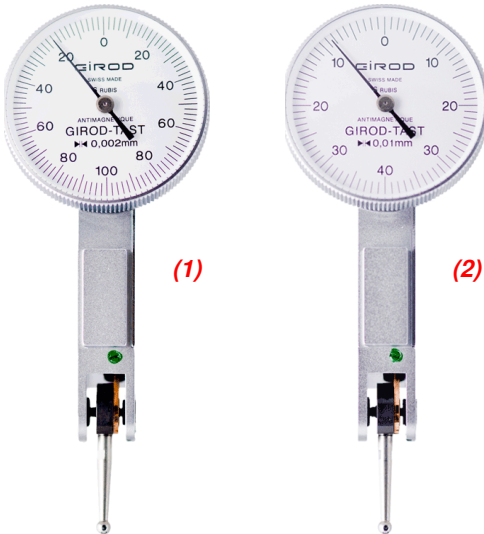

MSA		Measuring range	Precision	Ø dial	Circular scale
15.131	(1)	0.20 mm	0.002 mm	28 mm	0 - 100 - 0 mm
15.611		0.20 mm	0.002 mm	37 mm	0 - 100 - 0 mm
-		-	-	-	-
15.132	(2)	0.80 mm	0.01 mm	28 mm	0 - 40 - 0 mm
15.125		0.80 mm	0.01 mm	37 mm	0 - 40 - 0 mm

TESATAST standard lever indicator.

GIROD
INSTRUMENTS



Longitudinal lever

MSA	Measuring range	Precision	Ø dial	Circular scale
15.133	0.80 mm	0.01 mm	28 mm	0 - 40 - 0 mm

TESATAST standard lever indicator.