

0S10 0S20 0S11 0S21 0S00

MIYOTA

Size

<ligne>

13 1/2'''

Height

<mm>

4.13

Accuracy

<per Month>

±20 sec

Battery Life

5 years

*60 minutes chronograph operation per day

Battery consumption could be minimum by pulling out the stem (=Power-Saving)


Balance Weight

<μN.m>

Minute 0.40
Second 0.11
Small 0.02





Featured by Shock Detection

Clearance



Original Package

500 pcs

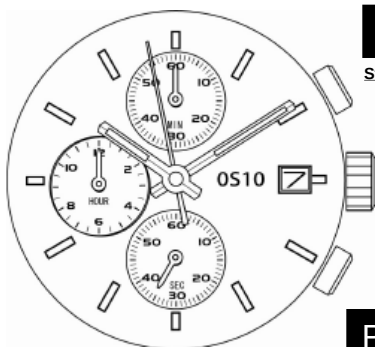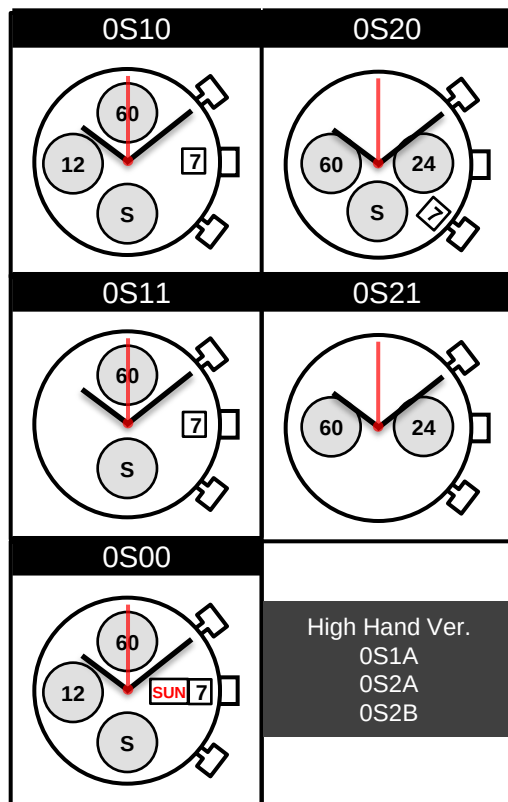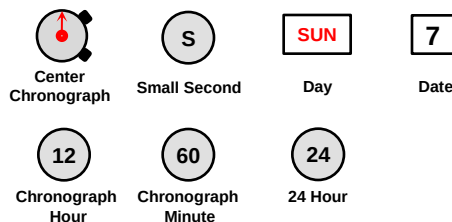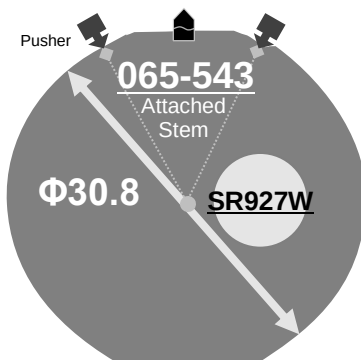

Push "A"

Start and Stop the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset

Push A to reset the hands position to the ZERO position.
And continue to push A to put them forward


Setting the Date

DO NOT set Day and Date
between 9:00pm - 1:00am

Push "B"

Reset the chronograph

DH1~DH2=25816($\pm$ 20)
Stroke for PB
must be minimum
600 $^{+200}_{+0}$ μ m



△		Quantity	Cal. NO.:
△		Unit	OS21
△		Scale	1/1000mm
△		Date	6/1
△		Drawn	Parts No.:
Mark	Date	Description	Name:
	Alterations	Approved	M. Fukuda
Material		General Tolerances	Frame for Case
Heat Treatment		Dimensions	Drawing No.: OS21C000
Hardness		Angles	
Plating			

2005/10/12 (12:57:10)

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

F

E


D

C

B

A


⑤			Quantity		Cal.NO.:
④			Unit	1 / 1000 mm	0S21-00Z
③			Scale	4 / 1	Parts No.:
②			Date		
①			Drawn		
Mark	Date	Description	Appr.	Checked M. Fukuda	Name:
Alterations			Approved		Indications for Dial
Material					Drawing No.: 0S21D010
Heat Treatment				General Tolerances	MIYOTA CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness				Dimensions	
Plating				Angles	

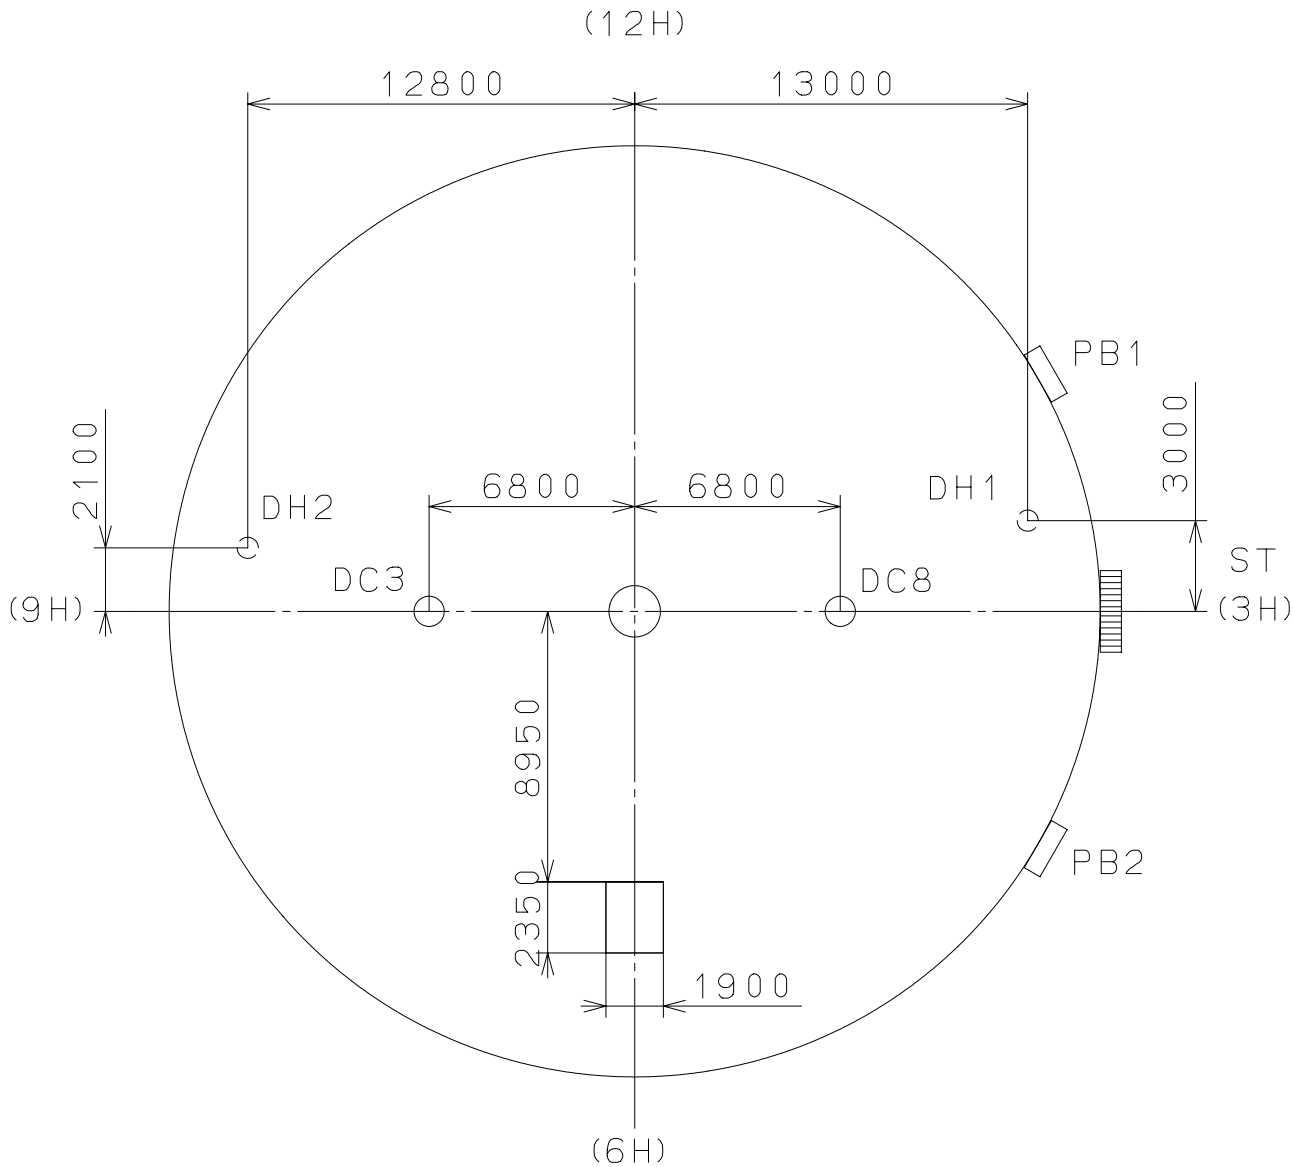

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-07-05

			Quantity		Cal. No. :
			Unit	1/1000 mm	
			Scale	20:1	
			Date		Parts : 065-453
			Drawn		
			Checked	T. Hiruta	
			Approved		Name : SETTING STEM
Material					Drawing No. : 4530S000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		



Section A-A

SO. 9, P=0. 225mm

1000

A

A

8500

5500

18785